

T150VR

15" Pos LCD Monitor

Products Features

- 15" diagonal TFT active matrix with LED backlight
- 5 wires Resistive touch integrated
- Low power consumption only 10W
- Smart cable management
- Optional 3 tracks MSR




Specifications

- **Cover Lens** : 5 wires resistive touch
- **Display type** : 15" diagonal TFT active matrix with LED backlight
- **Recommended resolution** : 1024 * 768
- **Brightness** : 300 nits
- **Contrast ratio** : 600:1(typ.)
- **Response Time** : TBA
- **LCD Viewing Angle** : 160 (H) / 145 (V) degrees
- **I/O Connectivity** : D-Sub 15 pins VGA, DC12V, D-Sub 9 pins (USB touch)
- **Power consumption** : 10W
- **Temperature(Operation/Storage)** : 0 ~ 40 degrees / -20 ~60 degrees
- **Humidity** : 20% ~ 90% non condensing
- **Physical Dimension (W*H*D)** : 381.4 * 310.5 * 200 mm



I/O indication

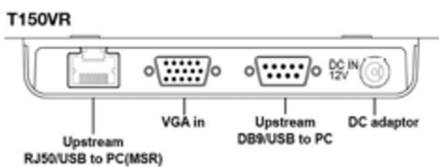

Dimension (unit: mm)



Universal power plug



Optional MSR & cable

