



## Flat Customer Display 2x20 Supports Multi-Language

- Υποστηρίζει όλες τις λειτουργίες εντολών προβολής POS
- Υποστηρίζονται 100 γλώσσες
- Interface: USB / RS232
- Τροφοδοσία από 5V έως 12V
- Αριθμός χαρακτήρων: 20 στήλων x 2 γραμμών
- Εύκολη συνδεσιμότητα με μια μεγάλη γκάμα προϊόντων POS
- Οδηγός OPOS/JPOS είναι στάνταρ



LD222 Flat Screen  
with Flat Design



LD222 in Blue Window  
White Housing



LD222 with  
Round Base



LD222 with  
Stretch Pole




# LD222

## Flat Customer Display

### Specification

General	Display Method	Vacuum Fluorescent Display (Blue-green)
	Number of characters	40 (20 columns x 2 lines)
	Brightness	500~1000 cd/m <sup>2</sup>
	Character font	5 x 7 dot matrix, cursor
	Character type	95 Alphanumeric, 32 International Characters
	Character size	5.5 (H) x 9.2 (W) mm
	Dot Size (X x Y)	0.86 x 1.2 mm
	Download characters	9 characters
	Panel Dimension	220 (W) x 50 (D) x 87 (H) mm
	Pole Dimension	Per support: 130 (L) x 34.5 (Dia) mm
	Base Dimension	217 (W) x 106 (D) x 33 (H) mm
	Viewing Angle	Max. 90°
	Horizontal Rotation	Max. 355°
	Weight	Approx. 980 grams
Commands Mode	UITIMATE, LD220, POS D101, AEDEX, UTC/S, UTC/P, ADM788, DSP800, CD5220, EMAX, LOGIC CONTROL	
Language Support	US English, Int'l English, Bosnia, Croatian, Czech, Danish, Dutch, Estonian, Faroese, Finnish, Flemish, French, Fr Canadian, German, Greek, Hebrew, Hungarian, Icelandic, Indonesian, Irish, Italian, Katakana, Latvian, Lithuanian, Norwegian, Polish, Portuguese, Romanian, Russian, Slovene, Slovak, Spanish, Swedish...	
Interface	RS-232 (serial) / USB	
Connection	Baud rate	Direct connection 9600 or 19,200 bps
Reliability	MTBF	30,000 hours
Power	Consumption	5~12 VDC
Safety	EMC standards Safety standards	FCC, CE

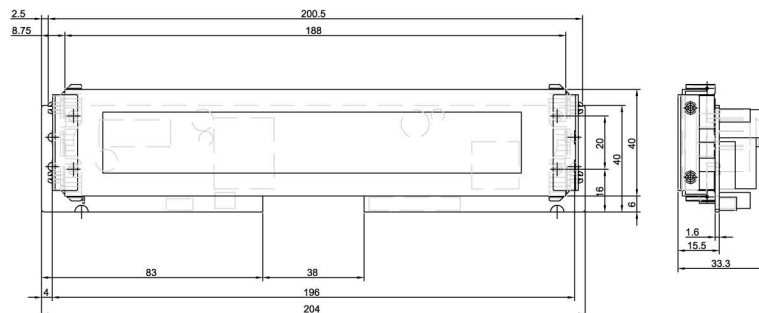

▲ VFD Module Kit also available