




Electronic Digital Scale  
Water proof type iPC-WP

**iPC-WP will lead you to a water world**

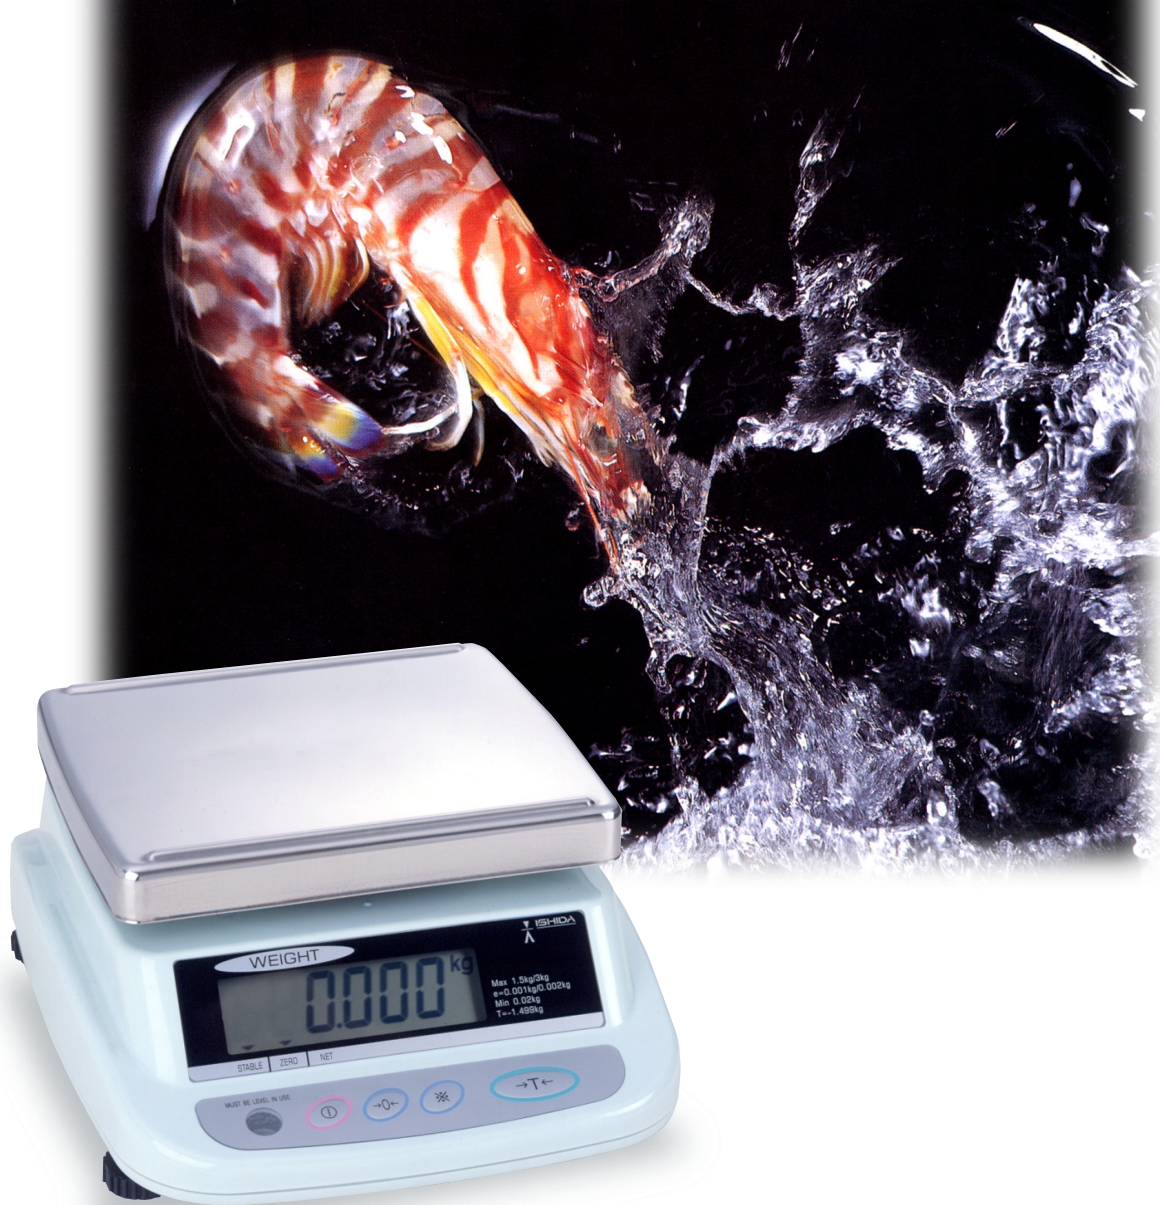

# iPC-WP... Compact, Portable Scale for Washdown Environments

## Features

### Durable Construction Equals Quality Performance

Meeting the demands of an IP-65 rating, Ishida's iPC-WP is protected from dust and low pressure water. The stainless steel platter is designed for ease, removal and frequent washing for food and chemical applications. The iPC-WP's sleek design is coupled with accuracy and user friendly operation.

### On the Go Convenience

Today's fast-moving business climate demands portable solutions. Quite simply your tools need to be where you are. That's precisely why we created the iPC-WP with both battery power and an AC adapter. When required, the iPC-WP is easy to move and instantly set up at remote locations such as farmers markets and roadside stands. Two D-cell batteries allow efficient, extended operation—as long as 500 hours, and an annunciator lets you know when to change them. The iPC-WP's selectable Auto Power Off function saves power and ensures long battery life.

### Large Display & Accessible Buttons

The large 25mm LCD panel provides instant weight identification and the optional dual display is ideal for retail applications.




## Specifications

Platter size	229 x 196 mm
Capacity and minimum graduation	Multi Interval
	3 kg
	1 g (0 ~ 1.5 kg), 2 g (1.5 ~ 3 kg)
	6 kg
	2 g (0 ~ 3 kg), 5 g (3 ~ 6 kg)
Weighing method	15 kg
	5 g (0 ~ 7.5 kg), 10 g (7.5 ~ 15 kg)
Strain gauge load cell	
LCD panel	Six digits (7-segment), character height 25 mm
Display information	6-digit weight, battery enunciator, decimal point, net weight enunciator, stability enunciator, minus sign, and unit of measurement
Power	2 Dry Cell D-Type batteries (up to 500 hours) or AC adapter. (Dry Cell batteries and/or AC adapter are not included) Auto Power Off function (can be set to 60 min., 20 min., or off)
Operational temperature	-5 °C ~ 40 °C
Weight	3.2 kg (excluding batteries)
Approvals	OIML, CE conformity for approval type
Option	AC adapter

## Dimensions

unit: mm

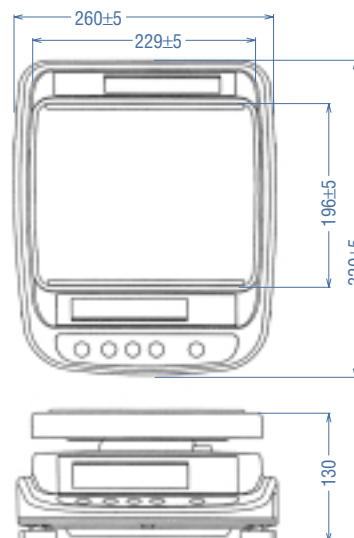

**ISHIDA**

**ISHIDA CO., LTD.**

44 SANNO-CHO, SHOGOIN, SAKYO-KU, KYOTO, 606-8392 JAPAN  
 PHONE: 81-75-771-4141  
 FACSIMILE: 81-75-751-1634  
 URL: <http://www.ishidajapan.com>

Design and specifications are subject to change without notice.

**ICS**  
 FOOD MACHINERY

[www.icsfm.gr](http://www.icsfm.gr)